

ZOpid[®]



**DSP Bluetooth Carkit
Speakerphone, Caller ID & Voice Prompts**

MODEL : HC-ZB323V

USER MANUAL

Safety and General Information

**IMPORTANT INFORMATION ON SAFE AND EFFICIENT OPERATION OF THIS PRODUCT.
READ THIS INFORMATION BEFORE USING YOUR DEVICE.**

Users are not permitted to make changes or modify the device in any way. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

Electromagnetic Interference/Compatibility

Note: Nearly every electronic device is susceptible to electromagnetic interference (EMI) if inadequately shielded, designed, or otherwise configured for electromagnetic compatibility.

Facilities

To avoid electromagnetic interference and/or compatibility conflicts, turn off your device in any facility where posted notices instruct you to do so.

Hospitals or health care facilities may be using equipment that is sensitive to external RF energy.

Aircraft

When instructed to do so, turn off your device when on board an aircraft. Any use of a device must be in accordance with applicable regulations per airline crew instructions.

Medical Devices

Hearing Aids

Some devices may interfere with some hearing aids. In the event of such interference, you may want to consult with your hearing aid manufacturer to discuss alternatives

Other Medical Devices

If you use any other personal medical device, consult the manufacturer of your device to determine if it is adequately shielded from RF energy. Your physician may be able to assist you in obtaining this information.

FCC Notice to Users

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Contents


Introduction	2
Package content	2
Sunvisor Mounting	3
Keys and Functions	4
Features	5
Pairing Procedure	5
Basic Functions	6
Missed calls Memory	6
Disconnect and Re-connect pairing	6
Answer, Hang up a call	6
Volume Control	6
Mute mic during conversation	6
Redial	6
Call Waiting	7
Call Transfer	7
Voice dialing	7
Make Call from Received calls or missed calls	7
Text to Speech Prompts	8

Introduction

- Handsfree carkit with Speakerphone, CallerID & Voice Prompts-Text to Speech(TTS)
- Use in **car, home or office.**
- Bluetooth version 1.2
- Supports Handsfree & Headset profiles.



Package content

Package includes 3 parts :

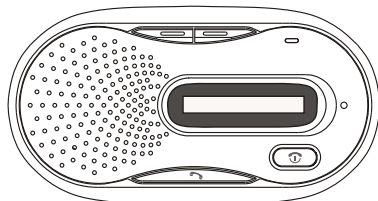

Main unit

Car charger




Rotating sunvisor clip

Mounting the car kit on sunvisor

Step I


Plug rotating clip into speakerphone bracket holder

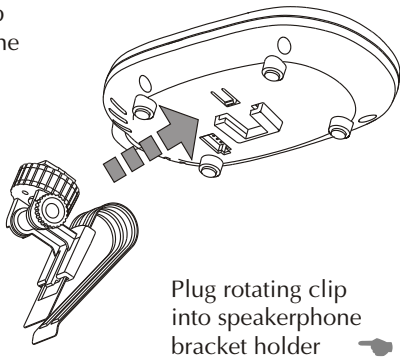


Step II

1. Slide the clip on to car's sunvisor
2. Adjust the carkit so LCD display can be read.
3. Fasten the screw.

Slide this clip on to the car's sunvisor




Mounting without rotating clip




Remove the adjustable clip

Put the plastic adapter into clip




Slide the metal clip (photo 2.1) into this bracket




Keys and Functions (front side)

1. LCD Display
2. Charging indicator
3. Microphone
4. Speaker
5. Volume down
6. Volume up
7. Answer Call
8. Power ON/OFF & Hang up call

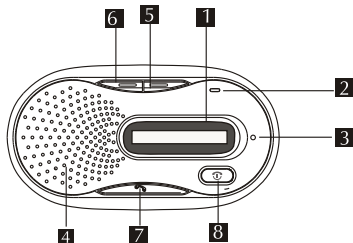


■ Side view

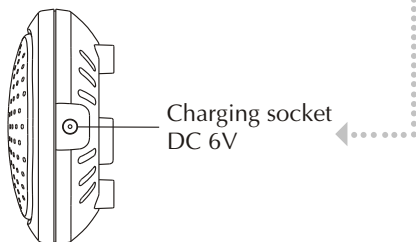

■ Back side view

IMPORTANT:

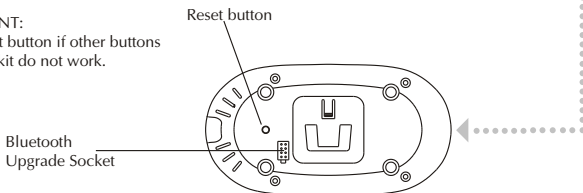

Press Reset button if other buttons on the carkit do not work.



Features












- Bluetooth v1.2
- Digital Signal Processing (DSP)
- Displays & announces caller's phone number
- Voice prompts for function status
- Mute microphone on/off
- Support voice dialing.
- Last number redial.
- 10 calls memory.
- Call transfer.
- Battery charging indicator.
- Pair-able with up to 4 devices.
- Talk time : up to 10 hours
Standby time : up to 230 hours.

Pairing procedure

- Step 1: Power on HC-ZB323V carkit by pressings and holding  for 5 seconds or until you hear the word "Ready".
- Step 2: Press and hold  for 5 seconds until you hear "Pair phone now" to activate pairing -HC-ZB323V LCD will display "Ready to Pair" and is now discoverable by your phone.
- Step 3: Activate "Bluetooth Pairing Process" on your phone-Refer to your phone's User Manual for detailed instructions.
- Step 4: On your phone,during "search for Bluetooth Devices", select HC-ZB323V from the list of discovered devices.
- Step 5: When prompted for the pass code "1234" .
- Step 6: Once pass code is accepted ,you will hear "Pairing Success to Phone"
- Step 7: HC-ZB323V display shows"connecting" and few seconds later you will hear "connected to phone".
- Step 8: HC-ZB323V display shows name of your phone (i.e.Nokia 3230,etc.)
- Carkit is now ready for use


Note : Pairing process is a one time setup for each phone - Please repeat this process if you will be using any other phones with this carkit(carkit saves pairing information of up to 4 phones)

Basic functions

- ☛ How to Power On
Press  for 5 seconds.
- ☛ How to disconnect
Press  for 2 seconds.
- ☛ How to re-connect
Press  once.
- ☛ Answer incoming calls
Press  button.
Press phone Answer call button.
- ☛ Reject and hang up a call
Press  button to reject or hang up.
or press phone hang up button to end the call.
- ☛ Volume up and down
Press  to increase volume
Press  to decrease volume
- ☛ Mute Mic during conversation
Press and hold .
The display show "Mute".
Press  again, the mic is on.
- ☛ How to redial.
Double click .
- ☛ How to power off
Press  for 5 seconds.


Call waiting

While on a phone call, a beep indicates a 2nd incoming call.

Press  to switch to the 2nd call and put first call on hold.

Double click  to switch back to 1st call.


Call transfer

Press and hold  to transfer a call from carkit to the phone.

Press  once to transfer the calls from phone to carkit.

Voice dialing


(Requires a phone with voice dialing feature & voice names stored in phone's address book)


Press  once and you will hear a beep.

Say the name stored in phone's address book.

If voice match is found, the phone will announce the name stored in address book and then dial the number. If no voice match is found you will hear double beeps.

Making a call from Received calls or missed calls.

Press and hold  for 2 seconds to enter into call Memory mode.

Press  once to select calls.

Press  once to view next recent calls.

Press  to dial number shown on the display.

Text to Speech (TTS) Prompts

When	Voice Prompt
Power ON HC-ZB323V	Ready
HC-ZB323V Ready to pair with mobile	Pair phone now
Press Volume + button	Volume up
Press Volume - button	Volume down
Increase the volume to maximum	Maximum volume
Decrease the volume to minimum	Minimum volume
Phone connects to HC-ZB323V	Connected to phone
Pairing with phone successful	Pairing success to phone
Power Off HC-ZB323V	Powering down
Hang up call	End of call
incoming call from 12345678	Call From 123 45678
When mobile disconnected with HC-ZB323V	Phone disconnected



Limited 1 Year Warranty

Coverage: Hi-Tech Trading (USA), Inc. (HiTT) warrants this product (Product) against defects in materials and workmanship under normal consumer use for 1 year from the date of purchase. HiTT, at its option, will at no charge repair, replace or refund the purchase price of this Product should it not conform to this warranty. This limited warranty is a consumer's exclusive remedy, extends only to the first consumer purchaser, is not transferable and is valid only on Products purchased by consumers in the United States or Canada.

Exclusions:

Normal Wear and Tear: Periodic maintenance, repair and replacement of parts due to normal wear and tear are excluded from coverage.

Batteries: Only batteries whose fully charged capacity falls below 80% of their rated capacity and batteries that leak are covered by this limited warranty.

Miscellaneous: This warranty does NOT cover defects or damage that result from: (a) improper operation, storage, misuse or abuse, accident or neglect, such as physical damage (cracks, scratches, etc.) to the surface of the Product resulting from misuse; (b) contact with liquid, water, rain, extreme humidity or heavy perspiration, sand, dirt or the like, extreme heat, or food; (c) use of the Product for commercial purposes or subjecting the Product to abnormal usage or conditions; (d) service, installation, alteration, or modification in any way by someone other than HiTT and, (e) other acts which are not the fault of HiTT.

Obtaining Service: To obtain service or information, please send email to help@hittusa.com. You will receive instructions on how to ship the Product, at your expense, to a HiTT Service Center. To obtain service, you must include a copy of your receipt.

ZOpid[®]

Company and contact Information :

Hi-Tech Trading (USA); Inc.

P.O. Box 179

Woodbury, NY 11797 U.S.A.

Web : www.hittusa.com

Email : help@hittusa.com

MADE IN CHINA

MODEL: HC-ZB323V

ZOpid and the Stylized Logo are registered in the US Patent & Trademark Office. All other product or service names are the property of their respective owners. c 2007 Hi-Tech Trading (USA), Inc.

The information contained in this User Manual is believed to be correct at the time of printing. HiTT reserves the right to change or modify any information or specifications without notice. The contents of this User Manual are provided "as is." Except as required by applicable law, no warranties of any kind, either express or implied, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose, are made in relation to the accuracy, reliability, or contents of this guide.