


REGISTER/PAIR CAMERA HS-CA240D WITH THE MONITOR:

- Turn camera power ON

IMPORTANT: Make sure all other HS-MS240D system cameras are powered OFF during pairing process

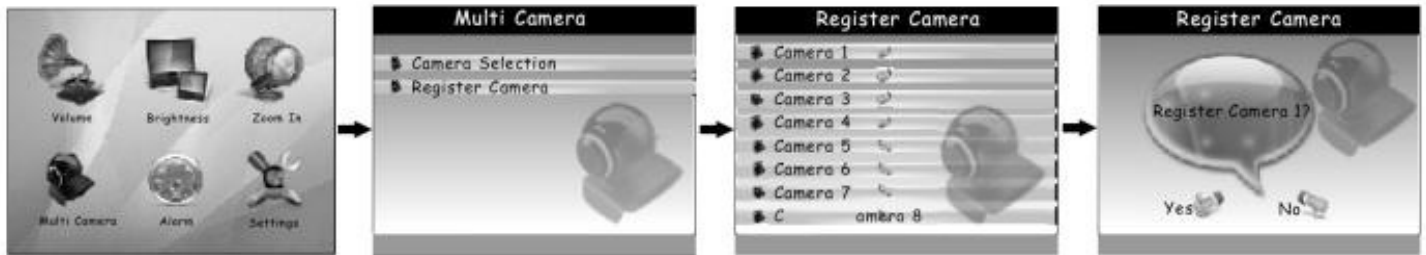

- Turn Monitor power ON
- Press “OK/MENU” button on the monitor to display Main Menu.
- Use “UP” or “DOWN” button to highlight “Multi Camera” Option and press “OK/MENU” button to complete the selection.
- From “Multi Camera” Menu highlight “Register Camera” using “UP” or “DOWN” button and press “OK/MENU” button to complete the selection.
- From “Register Camera” Menu highlight one of the available (not used) camera number you want to assign to this new camera and press “OK/MENU” button to complete the selection.
NOTE: Camera numbers which have already been used to register cameras have ‘thumbs up’ sign next to the camera number. To use one of those camera numbers, select that camera and complete next step to unregister that camera
- **Use “UP” or “DOWN” button to select “Yes”** and press “OK/MENU” button to complete the selection – the screen will display “Register camera #” where # is the camera number you selected
- **Press and quickly release ON/OFF button on the CAMERA** to complete pairing process – **IMPORTANT: Camera must be powered ON and this step must be completed while the monitor screen displays “register camera #”.**
- If pairing is successful, the screen will display “Camera # Registered”, where # is the camera number you selected in previous step. “Thumbs up” sign will appear next to the camera #.
NOTE: If the pairing/registration process is not successful repeat this process again and confirm that the camera is still ON
- Press Esc button twice to exit from the Menu and view the camera.